



MEASURING INSTRUMENTS

Export General Catalogue



ABOUT US



HIGH ACCURACY
UNMATCHED RELIABILITY
MULTIPLE APPLICATIONS

French measuring instruments manufacturer since 1979, **KIMO Instruments** is the essential reference in the measurement, detection, analysis and control of sensitive environments and air handling systems.

As a specialist in the measurement of pressure, hygrometry, temperature, air quality, air velocity and flow, KIMO Instruments designs and manufactures portable measuring instrument solutions, standalone data loggers, and fixed sensors intended for the monitoring of tertiary buildings, industrial installations and technical equipment: clean rooms and controlled environments, storage and production areas, **HVAC systems** (ventilation, air conditioning, heating, refrigeration), industrial processes, quality control, combustion analysis, etc. Thanks to its recognized expertise and the robustness of its products, KIMO Instruments supports professionals in mastering and optimizing technical environments, including the most demanding ones.

Industry-standard portable instruments for HVAC engineering

True partners for ventilation, air conditioning, heating and refrigeration professionals, with regular measurement needs and looking for robust and high-performance instruments.

Data loggers

Multi-parameter, versatile and built to last, KIMO data loggers offer a wide range of applications.

Transmitter sensors for permanent installation monitoring

Specially designed for environments where error is not permitted and for demanding industrial applications, KIMO sensors ensure reliable regulation and continuous monitoring of essential parameters in all circumstances.



KIMO Instruments is a member of the [Verder](#) group.



100% in France



**Our Manufactu-
ring Plant**



**Our Customer
Service Department**



**Our Metrology
Laboratories**



**Our Research &
Development Team**

Content

Combustion gas
analysers

04



HVACR portable

08



Data loggers

24



Transmitters

26



Combustion gas analysers 04

- A new degree of efficiency 04
- Features 05
- Si-CA 030 / 130 / 230 06
- Mobile app 07

HVACR Portable 08

- Classes 50 / 110 / 210 / 310 . . . 09
- Multi-function 10
- Thermometers 12
- Infrared 12
- Indoor air quality monitors 14
- Air flow meter 15
- HVACR range 16
- Digital refrigerant manifolds . . . 18
- Sauermann Pilot app 21
- Manifolds 22

Data loggers 24

- Mini / USB / Multi-function 25
- Connected 25

Sensor transmitters 26

- Monostats, class 20 28
- Class 110 / 210 R 28
- Multi-function 30
- Touch control & mobile app 32

Temperature probes 33

- CRYO 33
- Wire probes 33
- ABS head 33
- Connection 33

Manometers 33

- Inclined 33
- Vertical 33
- Differential pressure switch 33
- Accessories 33

Calibration benches 34

Our expertise 35

Combustion gas analyzers

A new degree of efficiency



Our combustion gas analyzers are ideal for maintaining combustion equipment, covering the full range of operations in residential, commercial and industrial applications.

KIMO offers a range of compact and intuitive analysers to enhance your performance.

KIMO's combustion gas analyzers feature the latest digital and metrology technologies, making measurements more reliable and cutting the amount of time heating engineers need to spend on-site. A user experience like no other!

Applications

- Boilers
- Water heaters
- Furnaces
- Industrial heating systems
- Burners
- Gas and diesel engines
- Industrial kilns
- Incinerators



Residential



Commercial



Industrial

Warranty



All devices come with a two-year warranty against manufacturing defects (subject to assessment by our after-sales department).

To find out more about our extended warranties and maintenance plans, please visit our website, or contact our Customer Service Department.



Features

Add a digital edge to your combustion analysis



Auto pump cut-off for high CO levels (adjustable)



Predictive maintenance with estimated sensor life & calibration reminders



Draft & differential pressure measurements



Mobile phone app for real-time remote display & control



Calculations for Combustion Efficiency, Excess Air & CO₂%



Data management with automatic logging & report creation



Si-CA 030



Si-CA 130



Si-CA 230

	Si-CA 030	Si-CA 130	Si-CA 230
LCD display size	2.8"	4.3"	4.3"
Display resolution	320 x 240 pixels	480 x 272 pixels	480 x 272 pixels
Touch-screen display	No (5 buttons)	Yes (+ on/off button)	Yes (+ on/off button)
Dimensions (H x W x D)	9,9 x 19,4 x 4,9 cm 7.5 x 3.5 x 1.6"	9,9 x 19,4 x 4,9 cm 7.5 x 3.5 x 1.6"	11,2 x 28 x 5,5 cm 11 x 4.3 x 2"
Weight	350 g - 12 oz	350 g - 12 oz	825 g - 30 oz
No. of cells	Up to 3 (O ₂ , CO, NO)	Up to 3 (O ₂ , CO, NO, Low NO)	Up to 6 (O ₂ , CO, NO, Low NO, NO ₂ , Low NO ₂ , SO ₂ , Low SO ₂ , CxHy, H ₂ S)
Max. CO measurement	8000 ppm	8000 ppm	50 000 ppm with dilution
CO dilution	-	-	✓
Field replaceable pre-calibrated sensors	-	✓	✓
Flue gas velocity with Pitot tube	-	✓	✓
Measurement storage	Smartphone	Internal: 2000 data points + Smartphone and PC	Internal: 2000 data points + Smartphone and PC
PC software (wireless & USB)	-	✓	✓
Smartphone app (wireless)	✓	✓	✓
Combustion applications	Residential, Commercial	Residential, Commercial	Commercial, Industrial



To see our extensive range of other measurement instruments for heating applications, go to www.kimo-instruments.com

Combustion gas analyzers

A new degree of efficiency



All the essentials for combustion gas analysis Si-CA 030

- Calculated CO₂ % value
- CO safety monitoring in ambient air
- Combustion efficiency and excess air calculations
- Emissions values adjusted for reference O₂
- NOx capable with NO sensor
- Quick and easy pump On/Off control



Color display



Auto pump cut-off for high CO levels

Comprehensive, versatile analyzer with touch-screen display Si-CA 130

- Calculated CO₂ % value
- CO safety monitoring in ambient air
- Combustion efficiency and excess air calculations
- Emissions values adjusted for reference O₂
- NOx and low NOx capable (optional)
- One Touch Pump On/Off with Purge
- Graphical data display
- Customisable gas analysis screen



Color display



Field replaceable precalibrated sensors



State-of-the-art, industrial emissions analyzer Si-CA 230

- Ergonomic, light weight and durable design
- One touch pump On/Off with purge
- Graphical data display
- Customisable gas analysis screen
- Emissions values adjusted for reference O₂
- CO safety monitoring in ambient air



Total NOx & Low NOx Capable




Field Replaceable Pre-Calibrated Sensors

Mobile app

Sauermann Combustion

The Sauermann Combustion app lets you control your Si-CA analyzer remotely, view measurement results in real time, and customise them before exporting in the format of your choice.

- PC software with USB and wireless connectivity
- Fast, easy wireless connection
- Remote live view of combustion analysis data as list or graph
- Remote control to change settings
- Data saving, including automatic logging
- Report creation in PDF, CSV (for Excel) and XML formats

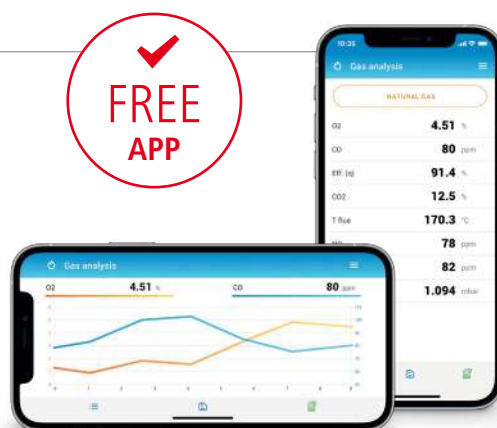

Download Sauermann Combustion app



Accessories

Customize your own analyzer



Our combustion gas analysers are available in many different configurations, with a wide range of accessories to choose from. Contact our Customer Services team for more information about our kits and accessories, and for guidance on choosing the right options for your needs.



Smart air temperature probe with 2 m cable
Ambient CO probe
Ambient CO₂ probe



180 mm flexible probe



180 mm, 300 mm & 750 mm,
and 1 m & 1.5 m probes



Draft probe



Differential pressure kit



Smoke pump



Double tube extension, 3 m



Wireless printer



SCU for condensate removal

Portable Instruments

For HVAC and Refrigeration

Temperature / Humidity / Pressure / Air velocity / Airflow /
Air quality / Gas detection / Light / Tachometry



Class 50, 110, 210 and 310

The range of portable devices is ideal for technicians responsible for maintaining heating, ventilation, and cooling installations.

- Wireless and Smart+ probes
- Graphical wide screen
- Data recording
- Ergonomic design



Graphical display



Magnetic protective cover



IP54 housing



Interchangeable probes & modules

Datalogger software for class 210 & 310

Configure / Measure / Data processing

- Configuration of instruments
- Instruments management
- Reports creation
- Customized channels
- Insert commands
- Insert legends and statistics
- Add mathematical functions



Class 50, 110 and 210



Hygrometers

HD 50 / 110
HQ 210

- 3 to 98 %RH
- -40 to +180 °C
- -50 to +80 °C_{td}
- CO: 0 to 500 ppm
- CO₂: 0 to 5000 ppm

Luxmeters

LX 50

Illuminance measurement

- 0 to 10 000 lux
- 0 to 929 fc

Tachometers

CT 50 / 110

- Optical: 60 to 60 000 rpm
- Contact: 30 to 3000 rpm



Refrigerant leak detector

Si-RD3

- Detection of all the HCFC and HFC refrigerants
- Detection of mixtures 5% hydrogen - 95% nitrogen (Nidron 5)
- Heated diode sensor
- Flexible hose



Manometers

MP 50 / 51 / 55 / 110 / 111 /
112 / 115 / 120 / 130 / 210

- Differential pressure
- ±500 Pa to ±2000 mbar
- Air velocity with Pitot tube
- 3 to 85 m/s
- Atmospheric pressure
- 800 to 1100 hPa



Anemometers

LV 50 / 110 / 111 / 117 / 130
VT 50 / 110 / 115 / 210

- Hotwire and telescopic hotwire
- 0.15 to 30 m/s
- Vane probes: Ø14, 70, 100 mm
- 0.3 to 35 m/s
- Airflow: 0 to 99 999 m³/h

AMI 310 Multi-function

Excellence in the service of measurement

AMI 310

AMI 310 is a multi-probe instrument which can measure up to 6 parameters simultaneously.



Wireless probes



Data processing software



Interchangeable probes & modules



Micro-SD card



Graphical display



Colour wide screen



- Pressure: ± 500 Pa / ± 2500 Pa / $\pm 10\,000$ Pa
 ± 500 mbar / ± 2000 mbar
- Thermocouple: -200 to $+1760$ °C
- Pt100: -200 to $+600$ °C
- Humidity: 3 to 98 %RH

- CO: 0 to 500 ppm
- CO₂: 0 to 5000 ppm
- Air velocity: -5 to 35 m/s
- Airflow: 0 to 99 999 m³/h
- Gas detection: 0 to 10 000 ppm
- Tachometry: 30 to 60 000 rpm

- Dew-point: -50 to $+100$ °C_{td}
- Wet temperature: -50 to $+100$ °C_{tw}
- Enthalpy: 0 to 10 000 kJ/kg
- Combination ratio: 0 to 10 000 g/kg
- Calculation of U coefficient and WBGT index





The + of class 210 and 310

Designed for the field

An overmoulding made of elastomere protects the instrument, guarantees shockproofing.

Nonstop measurements

This generation of instruments has an interchangeable and rechargeable Li-ion battery.

Expandable memory (AMI 310)

Internal memory of 1000 datasets of 20 000 measuring points. Built-in location for a micro-SD memory card.

Interchangeable probes

The probes use a mini-Din connecting cable which is compatible with all probes.



Interchangeable modules

1. Climatic conditions
2. Thermocouple (4 channels)
3. Pressure
4. U Coefficient



Accessories



Protective housing



Backpack



Transport case



Measuring cones



Debimo blades



Adjustable wedge for telescopic vane and hotwire probes



Pitot tubes

Thermometers

Performance that suits every need

Class 210

TM 210

The differential thermometer TM 210 allows the temperature of 4 thermocouple probes to be taken simultaneously and the differential value to be displayed.

This instrument is suitable for any process where it is necessary to control the temperature at several points.

- Temperature: -200 to +1760 °C
- 2 Pt100 channels
- 1000 datasets storage
- Calculation of U coefficient
- 4 thermocouple inputs



Wireless probes



Elastomere overmoulding



Data processing software



Interchangeable measurement modules



Thermocouple module
4 inputs



U coefficient module



SMART+ probes



TR 61/62

- 1 or 2 inputs
- Pt100
- -100 to +400 °C



TK 61/62

- 1 or 2 inputs
- Thermocouple K, J, T, S
- -200 to +1760 °C



Hold/Min/Max functions



Large choice of probes



General use

- -20 to 40 °C
- Penetration probe



Infrared

KIRAY 50 / 100 / 200 / 300

- Diagnose, inspect and check any temperature, with the advantage of using "no-contact" technology
- From -50 to +1850 °C



Indoor air quality monitors

Service, Residential & Commercial Applications

IAQ analysis



CO meters

CO 50

- CO: 0 to 500 ppm
- Temperature: -20 to +80 °C
- Hold function
- 2-line display



CO 110

- CO: 0 to 500 ppm
- Temperature: -20 to +80 °C
- CO max display, two configurable alarm thresholds
- 4-line display



Thermo-hygrometer - Air quality

HQ 210

- Hygrometry, temperature, CO₂ & CO gases and air velocity measurement (depending on models)
- Up to six measurements simultaneously
- Two inputs for Pt100 temperature (-200 to +600°C)
- Large graphic display
- Interchangeable measurement modules:
1 device = several possible ranges & parameters
- Supplied with calibration certificate



Air quality

AQ 110

- CO₂: 0 to 5000 ppm
- Temperature: -20 to +80 °C
- Hold function and min-max values, selection of units
- 4-line display



✓
SWIRL
airvent

Air flow meter

Air flow / Air velocity / Pressure

Air flow meter

DBM 620

Compatible with all air vent types.

- Interchangeable hoods
- Quick and easy mounting
- Simultaneous display of airflow and temperature
- Automatic airflow direction (extraction or air blast)
- From 35 to 4,250 m³/h (11 to 1181 L/s)
- Supplied with 610 x 610 mm hood and transport case



Switch between hoods quickly and easily



Patented folding frame & space-saving hoods storage



Transport case: compact storage system

Download on the
App Store

GET IT ON
Google Play



Easily edit your reports with the SmartKap application



4 optional hoods are available:

- 2.36 x 2.36 ft (720 x 720 mm)
- 2.36 x 4.33 ft (720 x 1320 mm)
- 1.38 x 4.99 ft (420 x 1520 mm)
- 3.35 x 3.35 ft (1020 x 1020 mm)

Remote velocity grid

Designed for air velocity measurements on any type of large ceiling vent or diffuser.

- Average air velocity from 24 points
- Telescopic and articulated pole: maximum length 2.05 m, 0 to 90°, positioning strut
- Backpack

HVACR range

It's all about simplicity

Digital differential pressure manometer Si-PM3 (ref. SIPM3)

This pocket-sized manometer can take two pressure measurements simultaneously, and you can connect a Pitot tube to measure air velocity and flow rate in a pipe.



Air velocity and air flow
with Pitot tube (optional)



Measuring range:
-150 to +150 hPa
(-60 to 60 inH₂O)



Dual input thermocouple thermometer Si-TT3 (ref. SITT3)

This instrument uses thermocouple technology to take two temperature readings at once (between -200 °C/-328 °F and 1 300 °C/2 372 °F). Ideal for checking the inlet and outlet temperatures of water heating systems.



Dual channel K
thermocouple
(2 probes included)



Accessory : 1 x K thermo-
couple wire probe class 2,
between -40 and +260 °C
(40 to 500 °F)
(reference : SIACCTC)

Thermo-hygrometer Si-HH3 (ref. SIHH3)

This thermo-hygrometer is a turnkey solution for measuring temperature and relative humidity, while dew point and wet bulb temperature are calculated via the accompanying mobile app.



Measuring range:
from 0 to 100%RH



Hotwire thermo-anemometer with telescopic probe

Si-VH3 (ref. SIVH3)

Sauermann's palm-sized Si-VH3 hotwire thermo-anemometer comes with a highly sensitive and accurate telescopic probe that easily measures air flow rate, velocity and temperature.



80 cm (31.5") telescopic probe
with double graduation



Vane thermo-anemometer with built-in vane probe

Si-VV3 (ref. SIVV3)

This thermo-anemometer, which features a vane probe with a long cable, can be used to measure air velocity and temperature at an air vent. Air flow rate is calculated via the accompanying mobile app.



Air velocity and
air flow meter



Large vane probe with
2 m (78.74") cable

Infrared thermometer

Si-TI3 (ref. SITI3)

Sauermann's Si-TI3 infrared thermometer is the ideal solution for contactless diagnosis, inspection and checking of surface temperatures.



Optical: D.S 12:1



Adjustable
emissivity



NEW

Digital refrigerant manifolds

Refrigerant handling, maintenance and commissioning



These manifolds can be used to commission and service all types of refrigerant-based installations: heat pumps, air conditioning, refrigeration and reversible systems, from domestic systems to complex industrial machines.

Very easy to operate, this equipment features the latest technologies for fast, comprehensive system diagnostics. Its smart digital assistant guides the operator in every situation to help him achieve his objectives in the best possible way.



**A1 / A2L / A3
refrigerants compatible**



**Durable anti-reflective
glass screen**



**Safe and rugged
for long data logging**



**High-speed NTC temperature
sensors**



**User-friendly troubleshooting
with diagnostics**



**New smart assistant app:
Sauermann Pilot**



Wireless vacuum probe

Si-RV4 (ref. 28143)

- High accuracy Pirani® sensor, 50 microns deep vacuum
- A1, A2L and A3 refrigerants compatible
- Quick & Strong wireless auto connection (100 m range)
- Real time readings on manifold and mobile app
- IP54 dust & rain proof probe



Wireless pressure probe

Si-RP4 (ref. 28144)

- A1, A2L and A3 refrigerants compatible
- Light and curved design for easy plug-in
- Quick & Strong wireless auto connection (100 m range)
- Real time readings through direct connection to mobile app
- IP54 dust & rain proof probe

Wireless temperature clamp

Si-RT7 (ref. 28142)

- Innovative "Parrot" shape to handle 6 to 42 mm pipes
- High-speed NTC temperature sensor with high accuracy
- Quick & Strong wireless auto connection (100 m range)
- Real time readings on manifold and mobile app
- Measurement range: -20 to 85°C
- IP54 dust & rain proof probe



Wired temperature clamp

Si-RT2 (ref. 28140)

- Innovative "Parrot" shape to handle 6 to 42 mm pipes
- High-speed NTC temperature sensor with high accuracy
- Wide measurement range: -50 to 120°C

Wired temperature probe for large diameter pipe

Si-RT5 (ref. 28141)

- Easy grip for large pipes up to 100 mm diameter
- High-speed NTC temperature sensor with high accuracy
- Measurement range: -20 to 85°C

Wireless temp-hygrometer (psychrometer)

Si-TH4 (ref. 28145)

- Fast and accurate Dry Bulb and Wet Bulb temperatures
- Outdoor, indoor and in-ducts measurements
- Flexible probe with sliding magnet for easy positioning
- Quick & Strong wireless auto connection (100 m range)
- Real time readings on manifold and mobile app



Digital refrigerant scale

Si-RS1 (ref. 28153)

- Extra Large Back-lit LCD Display
- 3 Display Modes (kg, lb, oz)
- 243 lb (110 kg) Capacity
- Strong Aluminum Base
- Rugged, Non-Slip Platform
- Accuracy $\pm 0.05\%$ of Reading



Two stage Vacuum pump

Si-RVP1 (110V : ref. 28155 / 220V : ref. 28154)

Si-RVP3 (ref. 28156)

- Motor: 1/3 HP (Si-RVP1) and 1/2 HP (Si-RVP2 and Si-RVP3)
- Free air displacement (50/60 Hz) : 85/70 lit/min (Si-RVP1) and 170/142 lit/min (Si-RVP2 and Si-RVP3)
- Spark free, A2L & A3 refrigerant (Si-RVP3 - Europe only)
- Refined cartridge machining process creates an improved surface finish extending the longevity of the pump life
- Expanded internal oil path creates less friction and ultimately less heat
- Upgraded seals insure maximum vacuum

Available kits and references

	 Si-RM350 (x1)	 Si-RT2 (x2)	 Si-RT7 (x2)	 Si-RV4 (x1)	 Hoses (x3)
Kit 1 : 28146	●	●			
Kit 2 : 28159	●	●			●
Kit 3 : 28147	●		●		
Kit 4 : 28160	●		●		●
Kit 5 : 28161	●	●		●	

	 Si-RM450 (x1)	 Si-RT2 (x2)	 Si-RT7 (x2)	 Si-RV4 (x1)	 Hoses (x4)
Kit 1 : 28162	●	●			
Kit 2 : 28163	●	●			●
Kit 3 : 28164	●		●		
Kit 4 : 28165	●		●		●
Kit 5 : 28148	●		●	●	
Kit 6 : 28149	●		●	●	●

Mobile app

Sauermann Pilot

The Si-RM350 and Si-RM450 manifolds, their probes and accessories can be interconnected independently. Additional functionalities can also be accessed via the new Sauermann Pilot mobile application.

Available on iOS and Android, this app provides invaluable assistance with a precise purpose: **to simplify and speed up the work of HVACR professionals.**


Digital tech leveraged to help technicians

- Real time control, readings display and recordings
- Create, sign and send reports with pictures
- Internal detailed customer database management

Download the app
Sauermann Pilot



App Store is a service mark of Apple Inc., registered in the U.S. and other countries.
Google Play and the Google Play logo are trademarks of Google LLC.

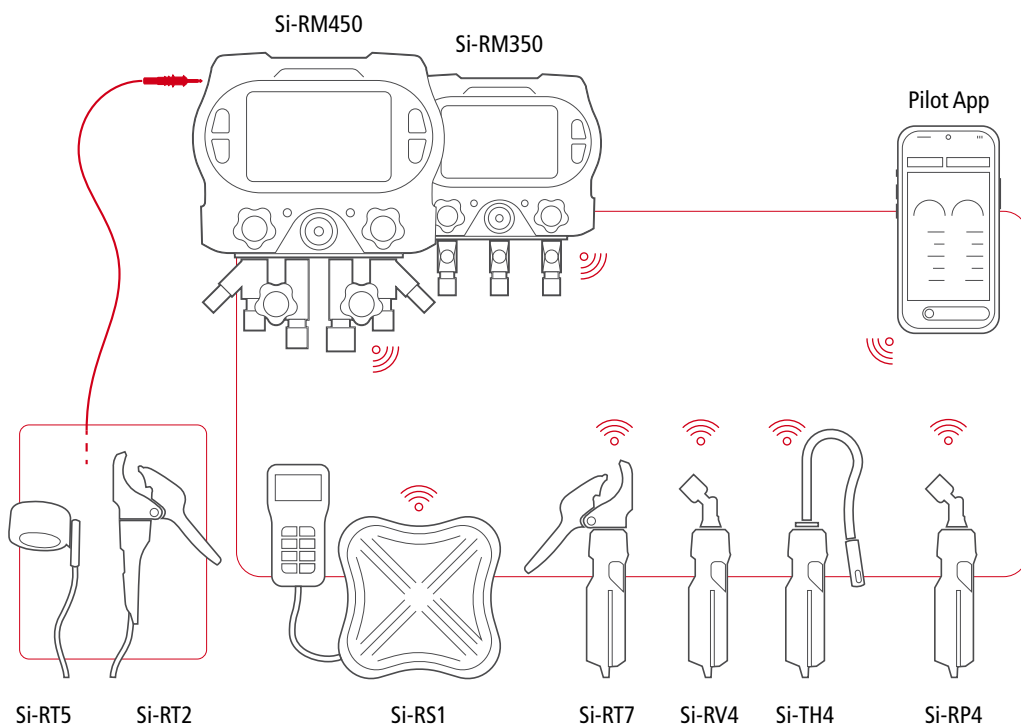

Manifolds

100% mobile application

Smart wireless manifold probes with dual valves Si-RM3 (ref. 25555)

The Si-RM3 manifold comes with two pressure probes (Si-RM1) that accurately measure high side and low side pressure and two temperature probes (Si-RM2) that are used to accurately and simultaneously provide real-time superheat/sub cooling calculations.



**Built-in Schrader®
core**



**Wireless connectivity
(range up to 30 metres)**



Smart wireless vacuum probe with dual valves Si-RV3 (ref. 25554)

Sauermann's Si-RV3 vacuum probe supports the quick, safe evacuation of refrigeration systems and heat pumps with highly accurate measurements.



**High accuracy
Pirani® sensor**

Combined manifold with smart wireless probes and 2-channel by-pass Si-RM13 (ref. 25558)

This Si-RM13 combines the sturdiness of the analog manifold with digital smart wireless temperature (Si-RM1) and pressure probes (Si-RM2). This premium package includes a traditional 2-channel analog manifold body (by-pass type) with flexible hoses and a durable block made of anodised aluminum.



**Built-in Schrader®
core**



**Wireless
connectivity (range
up to 30 metres)**



All-in-one mobile app

Si-Manifold

The **Si-Manifold app** for iOS and Android provides wireless connectivity up to a range of 30 metres. It has the ability to store and update up to 126 refrigerants, including environmentally-friendly low global warming potential (GWP) and natural refrigerants.

Pressure, condensation/evaporation, pipe, and ambient temperatures are instantly provided on the Si-Manifold app, as are vacuum measurements. Providing these measurements eliminates the need for manual calculations.



Wireless connectivity (range up to 30 metres)



Stores up to 126 refrigerants



Gauge, table and graphic visualisations



Export reports

Download Si-Manifold



Refrigerant leak detector

Si-RD3 (ref. SIRD3)

The Si-RD3 refrigerant leak detector uncovers leaks of most common refrigerant gases to a high degree of sensitivity, including all HCFC and HFC refrigerants, R1234yf, R1234ze, R290, R600a, and 5% hydrogen–95% nitrogen mixtures (Nidron 5 and Trace-A-Gas).



30 cm flexible probe



Visual and audio alarm

Data loggers

Kistock

Temperature / Humidity / Pressure / Air quality / Light /
Current / Voltage / Pulse / Water pressure



Anti-theft system

With the range of Kistock stand-alone data loggers and Kilog software, you can collect and analyse all the metrics of industrial climate control engineering processes, monitor the climatic environment of a chamber and respond to the traceability requirements of agri-food and pharmaceutical industries during transport.



Multi Application



2 programmable alarm thresholds



Up to 2,000,000 measuring points



Kilog software (option)



Probes



KNT 320



Kilog and Kilog-Lite



Anti-theft kit




Key benefits



Mobile application

- Wireless pairing
- Data visualisation
- Free download



Smart plug technology

Smart and interchangeable probes (class 320)

- Advanced technology
- Integrated calibration data



NEW

Mini wireless KH 30

Temperature, humidity

- -40 to +70 °C
- 0 to 100 %RH
- IP68
- Up to 8 years battery life
- Android & iOS app



Mini KH 50 / KT 50

Temperature, humidity

- -40 to +70 °C
- 5 to 95 %RH
- USB connection
- KH 50: IP20
- KT 50: IP65



USB KH 120 / KT 120

Temperature, humidity

- -40 to +70 °C
- 5 to 95 %RH
- Integrated software
- USB connector



KT 50 / KT 120
EN 12830



Multi-function KH 220 / KT 220 / KTT 220

Temperature, humidity, water pressure, light, current, voltage, pulse

- -200 to +1760 °C
- 5 to 95 %RH
- 0 to 10 000 lux
- 0 to 20 bar
- 0 to 20 mA, 0 to 600 A
- 0 to 10 V



Interchangeable probes



Connected

KT 320 / KTT 320 / KCC 320
KPA 320 / KP 320-321

Temperature, humidity, pressure, atmospheric pressure, air quality, current, voltage, pulse



Mobile application



Wireless pairing

- -200 to +1,760 °C
- 5 to 95 %RH
- 0 to 5000 ppm
- 800 to 1100 hPa
- -10 000 to +10 000 Pa
- 0 to 20 mA, 0 to 600 A
- 0 to 10 V

Transmitters


Measure with confidence

Pressure / Temperature / Humidity / Air velocity and air flow / Air quality /
Solar / Light / Atmospheric pressure



**Designed and manufactured in France,
KIMO's range of transmitters can be used
in all industries,
in the service sector or in OEM.**

From the simplest to the most elaborate, these advanced measuring instruments can be adapted to any type of application thanks to their configuration and calculation possibilities.



**Configurable
outputs**




**Visual and
audible alarm**



**Tightness ABS
housing**

Overview

Transmitter sensors

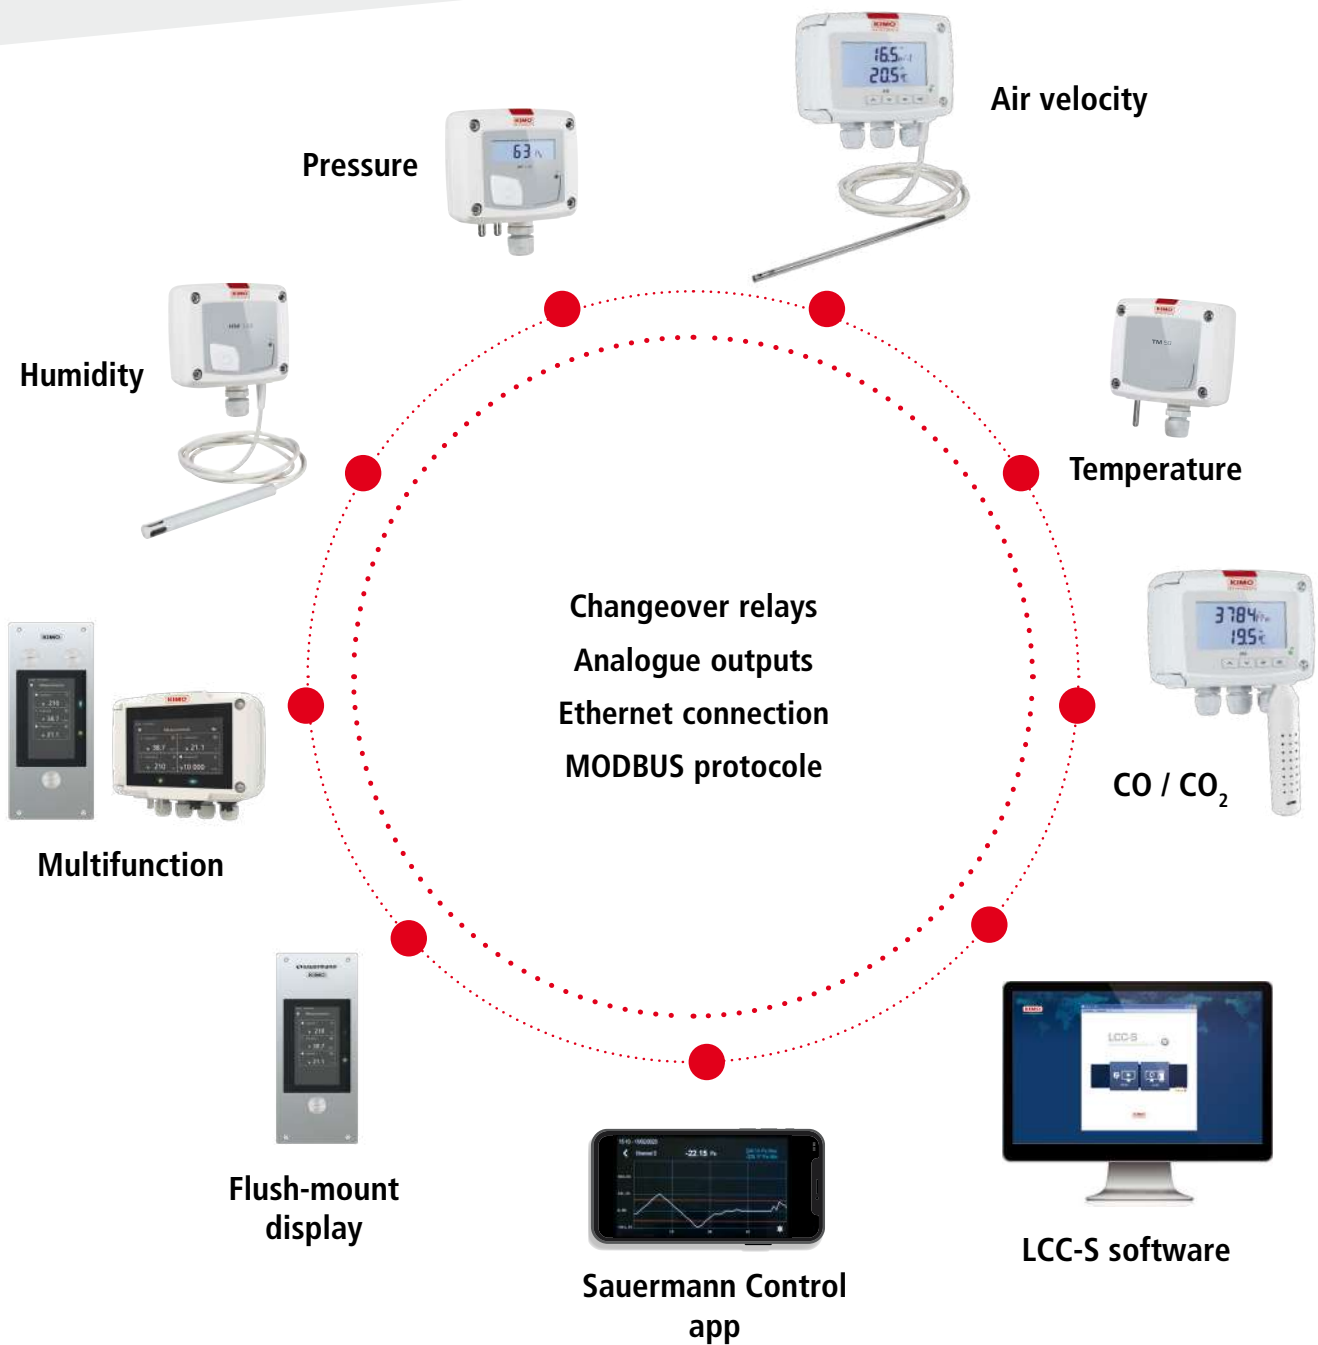

NEW



CP 20: differential pressure transmitter



TH 20: humidity transmitter

Monostats & classes 20/110/210

Control Your Equipment with Accuracy

Pressure

PST / CP 20 / CP 110 / CP 116 / CP 210-R

- ± 100 Pa to $\pm 10\,000$ Pa
- 3 to 85 m/s
- 800 to 1100 hPa (CP 116)
- -100 to +400 °C (CP 210-R)



Humidity

HST / TH 20 / TH 110 / HM 110 / TH 210-R

- 0 to 100 %HR
- -40 to +180 °C

Air velocity

CTV 110 / CTV 210-R

- 0 to 30 m/s
- 0 to 99 999 m³/h
- 0 to +50 °C



Simplified calibration

Electronic board and measuring element connected to the front side of the sensor, which allows to configure and calibrate your device without causing any damage.



CO / CO₂ transmitters

Kimo designed CO / CO₂ transmitters in order to meet with requirements of new standards and decrees on air quality.



CO

CO 110 / COST-S

- 0 to 500 ppm

CO₂

CO 112 / COT 212-R / CO2ST-S

- 0 to 5000 ppm
- 0 to +50 °C



Temperature

TST / TM 50 / TM 110 / TM 210-R

- -100 to +400 °C
- IP65 protection



LCC-S software


Configuration software for monostats, class 110, 210 and 310 transmitters

- Compatible with the whole range (except class 20)
- Configure your devices
- Save data
- View your measurements in real time
- Protection
- Adjustable alarm thresholds
- Save a configuration to apply it to other devices



Multi-function transmitters

Solutions and performance suitable for every environment

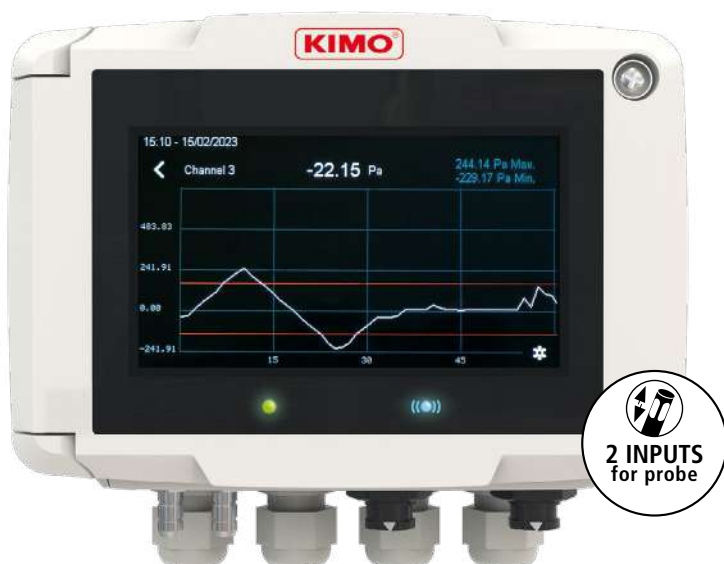

Multi-function transmitter

Si-C320

Graphical touch screen

Display and measure 4 parameters simultaneously

IP66 housing, VHP resistant

4 RCR relays (option)

4 analogue outputs


Wireless communication with mobile application (option)

Ethernet communication (option)

- -10 000 to +10 000 Pa
- 0 to 100 %HR
- -80 to +150 °C
- 0 to 30 m/s
- 0 to 99 999 m³/h
- 800 to 1100 hPa
- CO: 0 to 500 ppm
- CO₂: 0 to 10 000 ppm
- COVT: 0 to 1000 ppb
- CO₂eq: 400 to 2000 ppm
- 800 to 1100 hPa



**Multifunction
for VAC and IAQ
applications**




**4 analogue
outputs**



**RS-485 interface
for Modbus RTU
protocol**



**4 visual and
audible alarms**

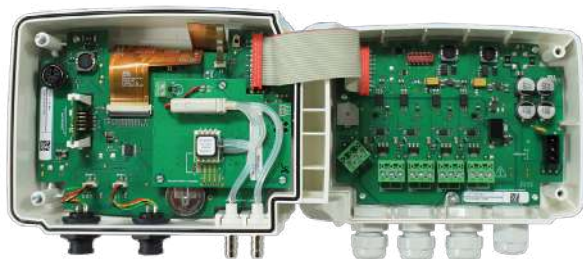

24 V_{DC} / 24 V_{AC} power supply

Other calculated parameters

- Absolute humidity, dew point, specific humidity, humidity temperature, enthalpy and freezing point.



Interchangeable probes

Si-C320 and Si-CPE320

Temperature / Humidity / Air velocity / CO / CO₂ / Pressure



Connection to a computer at the front

Flush-mount multi-function transmitter Si-CPE320

Special for clean room
Front calibration
Simultaneous display of 1 to 3 parameters
ABS IP66 housing, vaporized hydrogen peroxide resistant
3 configurable analogue outputs
MODBUS Output

- Measuring range: from -250 to +250 Pa



3 visual and audible alarms



Brushed 316L stainless steel front panel



Touch screen

Flush-mount display Si-ATE320

Special for clean room
Simultaneous display of 1 to 3 parameters
ABS IP66 housing, vaporized hydrogen peroxide resistant
MODBUS Output



Large display transmitter



Multi-function transmitter CA 310

1 SPI-2 or MVA card input
3 RCR relays
Digital output (option)
Supplied with adjusting certificate

- From -10 000 to +10 000 Pa
- From 0 to 100 %RH
- From -50 to +180 °C
- From 3 to 85 m/s
- From 0 to 99 999 m³/h
- CO : from 0 to 500 ppm
- CO₂ : from 0 to 5000 ppm
- From 800 to 1100 hPa
- From 0 to 10 V
- De 0 à 20 mA



Probes for CA 310

Temperature / Humidity / Air velocity / CO / CO₂ / Pressure...

NEW TECHNOLOGIES

Touch control and mobile application

Full Si-C320 and Si-CPE320 setup



Trend indicator: up to 4 parameters displayed simultaneously



History: chart display



Touch screen

No physical buttons: better sealing and less mechanical failure



Simultaneous display of up to 4 measurements

Chart form display




Full device setup



Indicator lights

blue light:
wireless connection

green light:
power on

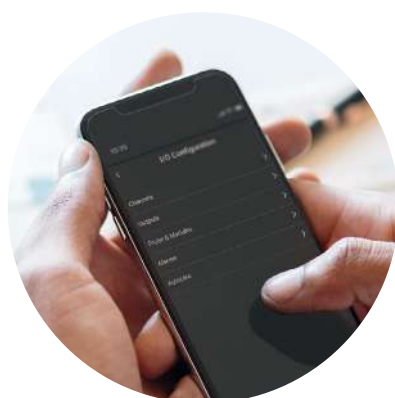

Sauermann Control app

It is also possible to control and configure the class 320 transmitters with a computer, a smartphone or a tablet via the Sauermann Control application, which allows the user to manage all the device's parameters via its wireless connection module (USB wired for computers). This app can also easily update the firmware of the instrument and its probes.

- Wireless connection with iOS and Android
- Full device control
- Downloading recorded measurements
- One-click firmware update
- Remote measurement viewing

Temperature probes

The right temperature for every application

Thermocouple / Pt100
Head / Cable / ABS probes



**CRYO and
Wire probes**



ABS head



Connection head



Measuring range
-200 to +1150 °C



Calibration
-200 to +1500 °C



**Pt100
probes**



**Thermocouple
probes**

Liquid column manometers

Differential pressure



Inclined

- 0-5 to 0-80 mmH₂O
- Units: Pa, daPa...



Vertical

- 0-100 mmH₂O to 0-2.6 bar
- Units: mbar, Pa...



**Differential
pressure switch**
Si-DPMS

- Setting ranges in Pa:
20-200, 50-500,
200-1000, 500-2500,
1000-5000



Pressure gauges
for measuring
differential pressure

ACCESSORIES

To fit any installation with
proper connections

- Liquid for manometer
- Tubes, junctions
- Pressure connections, wall-crossing
connection...




Our expertise

Manufacturing / Laboratories / R&D



Customer service portal

For all requests concerning repair, returns or calibration, connect to our Customer Service Portal.

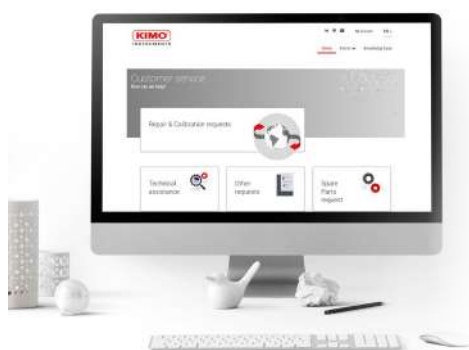

Accessible
24h/7



Quick and
simple



Real-time
tracking

kimo-en.custhelp.com

State-of-the-art facilities and highly skilled staff

KIMO relies on cutting edge expertise, with more than 20 experts working in 800 m² of testing and calibration laboratories around the world, with production lines in France, the United States and China. Our research and development

is conducted in-house by a young team of 20 engineers and 10 forward-thinking technicians. Their quest for innovation and patents is focused on ergonomics, digitalisation and connected devices, along with the constant improvement of the electronic and mechanical quality of our measuring instruments and condensate pumps.

Our in-house laboratories offer testing, adjustment and calibration services for a wide range of measuring instruments.

They are also one of the pillars of our high quality after-sales service. Our after-sales service covers multiple state-of-the-art activities to address all parameters related to indoor air quality.



Calibration
and adjustment



Repair /
maintenance



Hotline

Since more than 45 years, KIMO has been developing its expertise in metrological services in many fields:

- Temperature
- Hygrometry
- Air flow rate
- Air velocity
- Pressure
- Gas analysis
- Weighing
- Radiometry
- Tachymetry
- Luxmetry
- Electricity



Storage of sensitive products: ambient monitoring

Indoor air quality is of prime importance in enclosed spaces such as commercial and public buildings. The accuracy and reliability of the instruments used to monitor the status of air handling unit (AHU) filters is therefore essential.

Air handling unit filters act as protective shields for the comfort and health of users, but they can also become clogged. To prevent clogging, protect the air handling system and save energy, it is essential to monitor the differential pressure across these filters.

Parameters to be monitored: Temperature / Hygrometry

CONTINUOUS MONITORING

The climatic stability of the enclosures is influenced by external factors and door openings. It therefore requires precise temperature and hygrometry monitoring, provided by Kimo instruments that alert operators to any deviation.

Kimo's extensive range of transmitters can be positioned outside the enclosure with a remote sensor combining temperature and humidity. Data is displayed and transmitted in real time to the monitoring system, via analog or digital signals or programmable electrical contacts.

DATA LOGGING

Data recording and archiving are essential for audits, as well as for observing and studying the behaviour of climatic chambers. They help

minimize incidents linked to variations in temperature or humidity.

The KIMO recording solutions offer autonomous monitoring of these parameters over long periods, with alerts in the event of variations. They provide a complete history in the form of graphs or tables of values, to create detailed reports on their operation.

METROLOGICAL SERVICES

Strict metrological monitoring and calibration of temperature and humidity sensors are essential to ensure measurement accuracy. Regular recalibration detects the slightest drift and preserves the traceability required by quality audits.

KIMO's teams visit sites throughout France to work on all types and brands of sensors. Our highly qua-

lified technicians carry out these calibration services on state-of-the-art test benches linked to national standards, guaranteeing optimum calibration accuracy.



FRENCH EXPERTISE IN THE
SERVICE OF MEASUREMENT
SINCE 1979



Uithoorn

Anton Philipsweg 1
1422 AL Uithoorn
Nederland

+31 (0)297 - 514 614
info@hitma-instrumentatie.nl
www.hitma-instrumentatie.nl



For more information
Hitma-instrumentatie.nl

Almere

Antennestraat 26
1322 AB Almere
Nederland

+31 (0)36 - 535 0651
info@hitma-instrumentatie.nl
www.hitma-instrumentatie.nl



For more information
Hitma-instrumentatie.be

Antwerpen

Brusselstraat 51
2018 Antwerpen
België / Belgique

+32 (0)2 387 - 2864
info@hitma-instrumentatie.be
www.hitma-instrumentatie.be



Plus d'information
Hitma-instrumentatie.be